
Specifications MEZZO36 Please consult the manufacturer's MEZZO36 HEAT installation manual for all details and requirements before making a final 36" Direct Vent Gas Fireplace No one builds a better fire design layout decision. FRONT WIDTH BACK WIDTH HEIGHT DEPTH **GLASS SIZE** MODEL Actual Framing Framing Framing Actual Actual Actual Framing MEZZO36 35-1/2 x 12-1/2 46-3/16 48-1/4 46-3/16 48-1/4 41-3/4 42 17-1/8 18-1/4 [25] 46-3/16" [1173] H T H 18-5/8" 17-1/8" [471] [435] 8-9/16" [217] A 1 Ø 8" [203] CENTERED ON APPLIANCE Top 50" [1270] 39-1/4" [997] 6'3" 42-1/2" [1600] [1080] 41-3/4" [1060] ⋪ 15-5/8" 24-1/2" 4" 23-3/4" [397] [622] [102] -3/8' [603] ¥ [60] 7-1/4 [184] (lo ° 8-9/16" 2-3/4" 8-9/16" 8-7/8" ELECTRICAL ACCESS GAS ACCESS [217] [70] [217] [225] Left Front Right

Decorative Fronts Dimensions and Framing

MEZZO36

FRONT DIMENSIONS

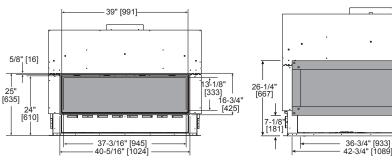


Clean Face Trim


- Rectangular holes on bottom of access panel <u>should be covered</u>.
- Approved for 0"-4" finishing material on inside fit method
- If finishing materials are O-1" thick, the outer trim ring should be adjusted out so that the trim ring overlaps the finishing material. This is intended to provide the cleanest look.
- If finishing materials are 1-4" thick, install the trim ring all the way in. Finishing materials may not extend past the outside edge of the trim ring.




HEAT&GLO, No one builds a better fire



Inside Fit Method (Clean Face Trim)

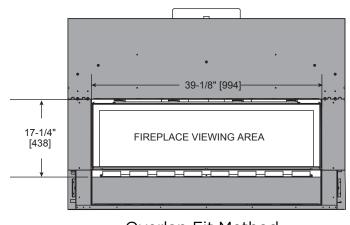


Overlap Fit Method (Loft Forge, Quattro)



19" [483]

13"^{[-} [330]


- Rectangular holes on bottom of access panel <u>must be exposed</u>.
- ONLY approved for 0"-1" finishing material on overlap fit method




Quattro Front

- Rectangular holes on bottom of access panel <u>must be exposed</u>.
- ONLY approved for 0"-1" finishing material on overlap fit method


APPLIANCE LOCATION




WALL PENETRATION

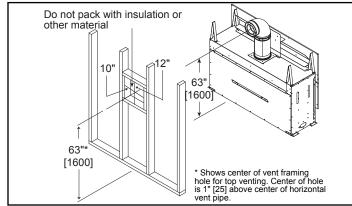

MANTEL PROJECTIONS - COMBUSTIBLE




MANTEL PROJECTIONS - NON-COMBUSTIBLE

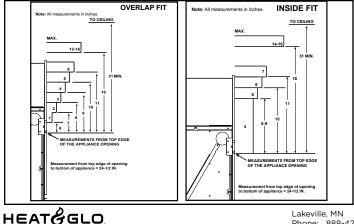

No one builds a better fire


FRAMING DIMENSION




APPLIANCE MAY BE INSTALLED OFF OF FLOOR***

- Adjust framing dimensions for interior sheathing (such as sheetrock)
- ** Header depth not to exceed 3-1/2".
- *** If appliance is installed off the floor, maintain required clearances to combustibles Construct platform in accordance with local building codes

CLEARANCES TO COMBUSTIBLES



MANTEL LEG/WALL PROJECTIONS



Web: heatnglo.com

Phone: 888-427-3973 952-985-6000

CAN	CSA 2.33-2014
CUL)US LISTED	UL307B

installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury.

Additional information can be found online at www.heatnglo.com

