
Specifications

The first name in fireplaces

Please consult the manufacturer's installation manual for all details and requirements before making a final design layout decision.

Crave7260 60" Direct Vent Gas Fireplace

Crave CRAVE7260

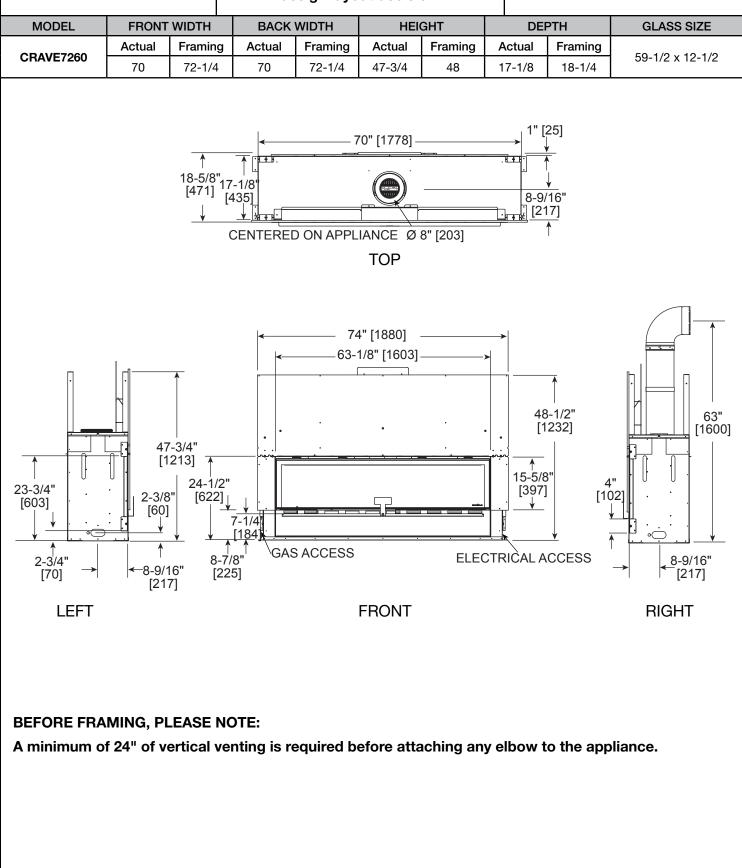


Additional information can be found online at www.heatilator.com

Crave CRAVE7260

Decorative Front Dimensions and Framing


FRONT DIMENSIONS



CLEAN FACE TRIM


- Rectangular holes on bottom of access panel <u>should be</u> <u>covered</u>.
- Approved for 0"-4" finishing material on inside fit method
- If finishing materials are 0-1" thick, the outer trim ring should be adjusted out so that the trim ring overlaps the finishing material. This is intended to provide the cleanest look.
- If finishing materials are 1-4" thick, install the trim ring all the way in. Finishing materials may not extend past the outside edge of the trim ring.

FINISHED OPENING DIMENSIONS

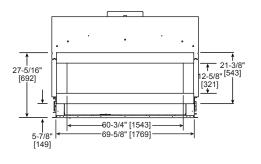


FOUR SQUARE FRONT

- Rectangular holes on bottom of access panel <u>must be exposed</u>.
- ONLY approved for 0"-1" finishing material on overlap fit method




ILLUSION FRONT

- Rectangular holes on bottom of access panel <u>must be exposed</u>.
- ONLY approved for 0"-1" finishing material on overlap fit method

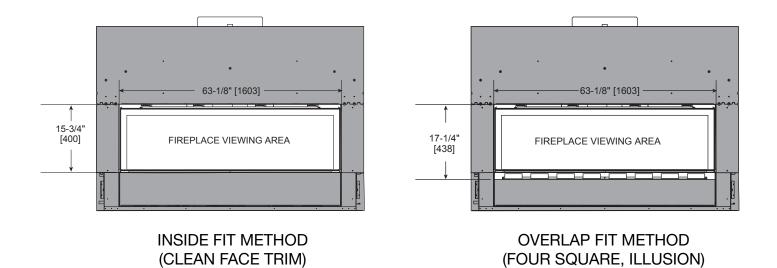


The first name in fireplaces


APPLIANCE LOCATION

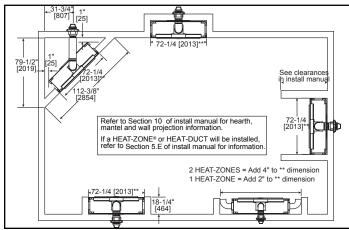


WALL PENETRATION

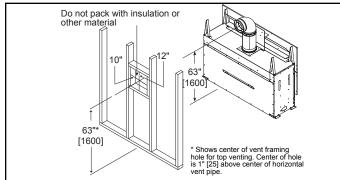


MANTEL PROJECTIONS - COMBUSTIBLE

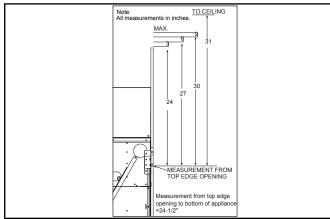


MANTEL PROJECTIONS - NON-COMBUSTIBLE

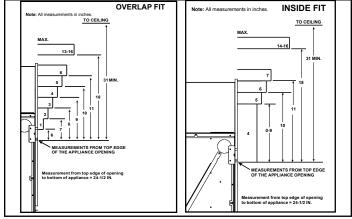


FRAMING DIMENSIONS

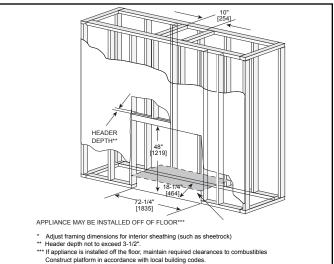

CLEARANCES TO COMBUSTIBLES

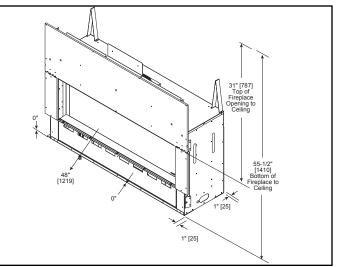

MANTEL LEG/WALL PROJECTIONS

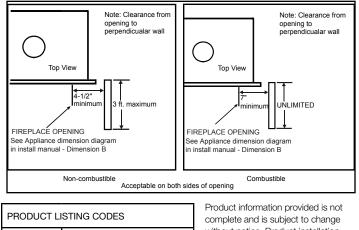

US	ANSI Z21.88-2014
CAN	CSA 2.33-2014
	UL307B

complete and is subject to change without notice. Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury.

Additional information can be found online at www.heatilator.com

meatilator

The first name in fireplaces

