




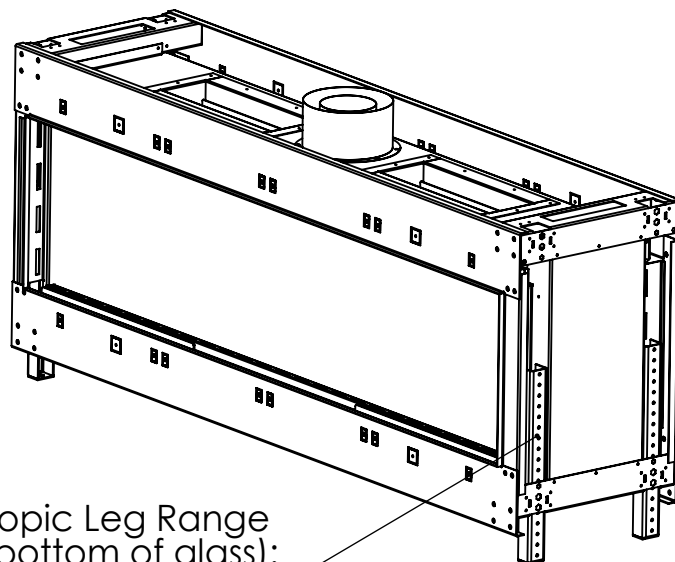

# FLARE See Through 70

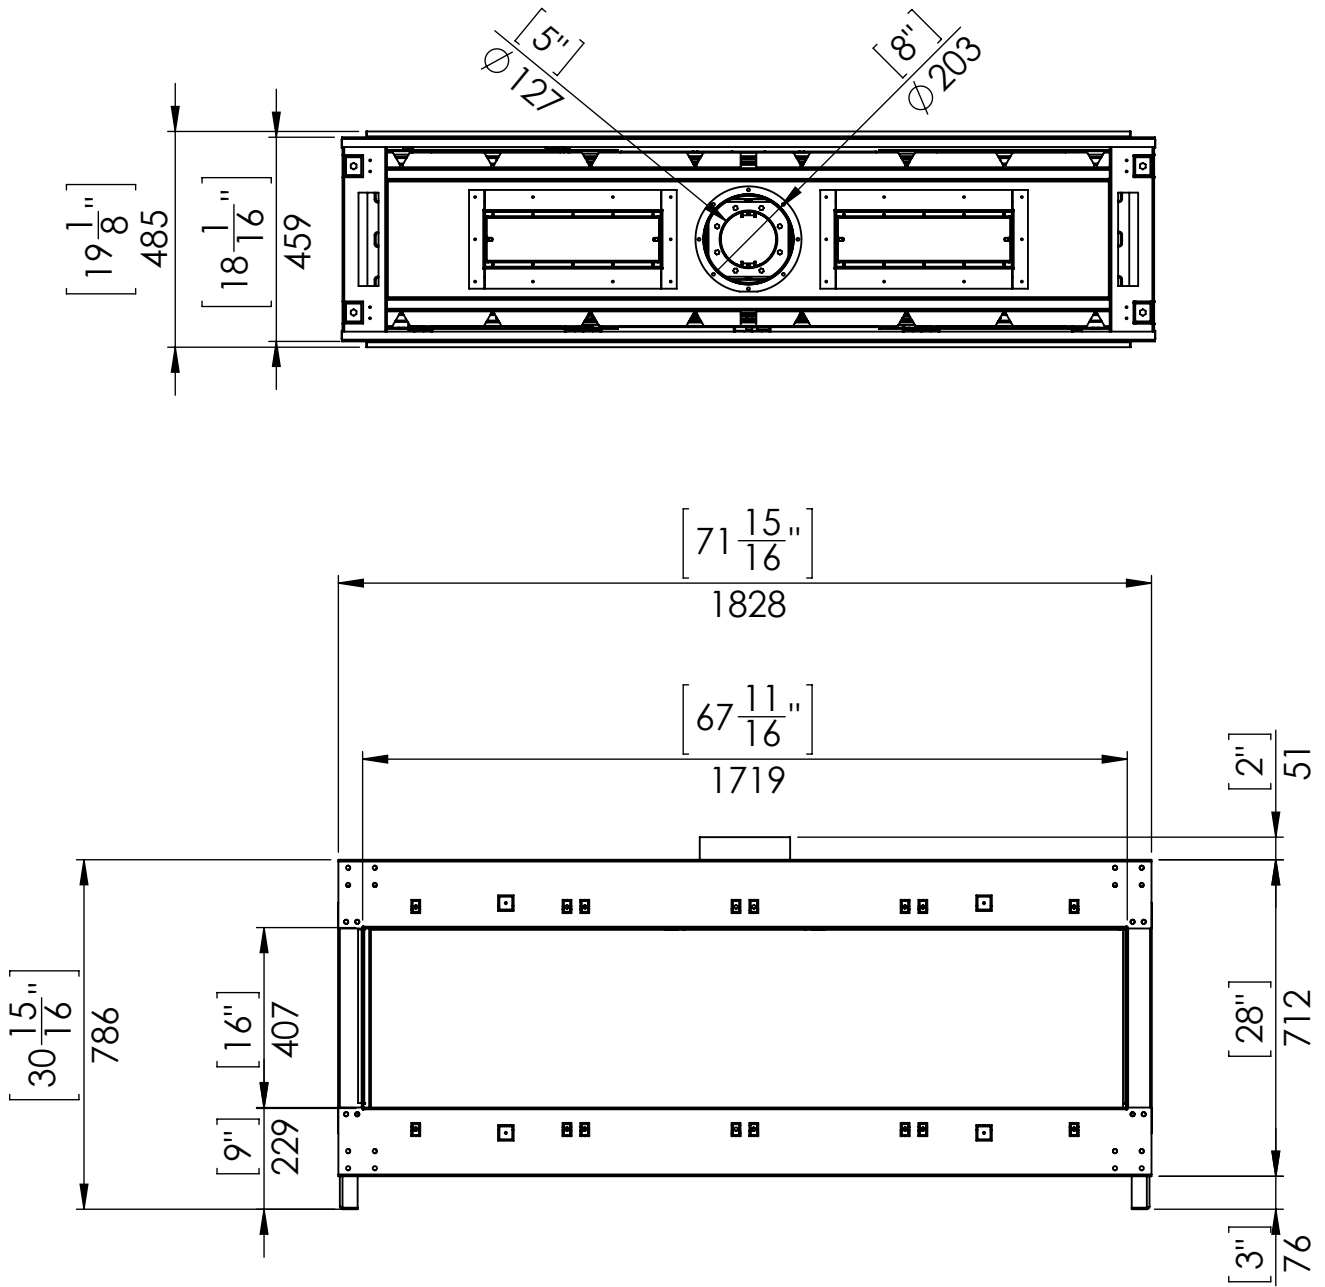


Telescopic Leg Range  
(from bottom of glass):  
9" - 19"

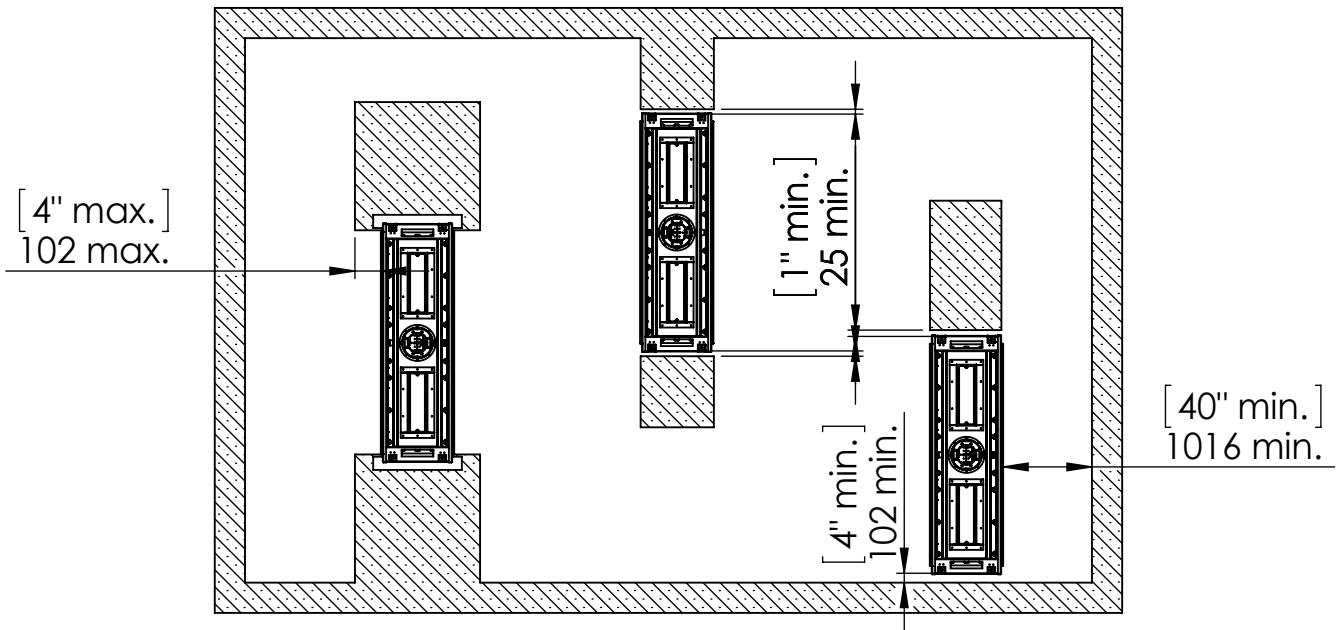

## Chimney Installation


### Horizontal Termination

For 5 x 8 vent size create 10" x 12" vent termination opening

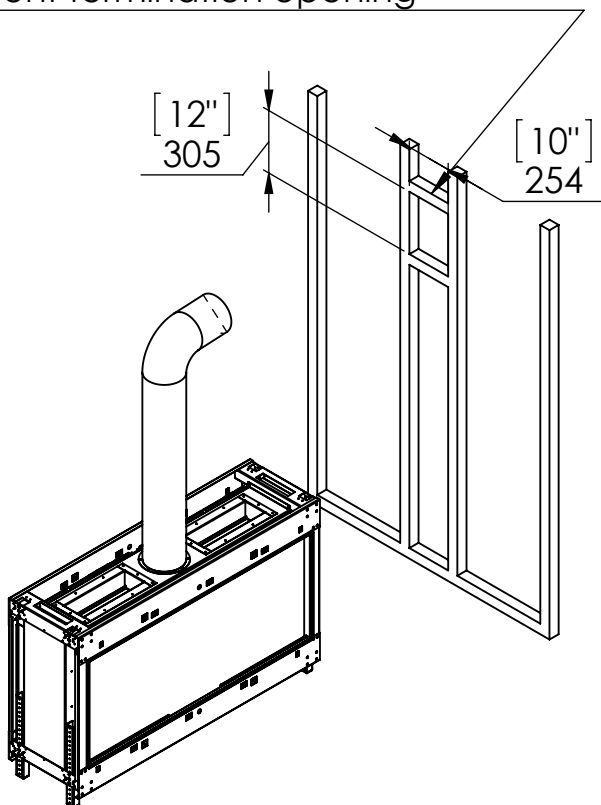


### Vertical Termination


For 5 x 8 vent size create 10" x 10" vent termination opening

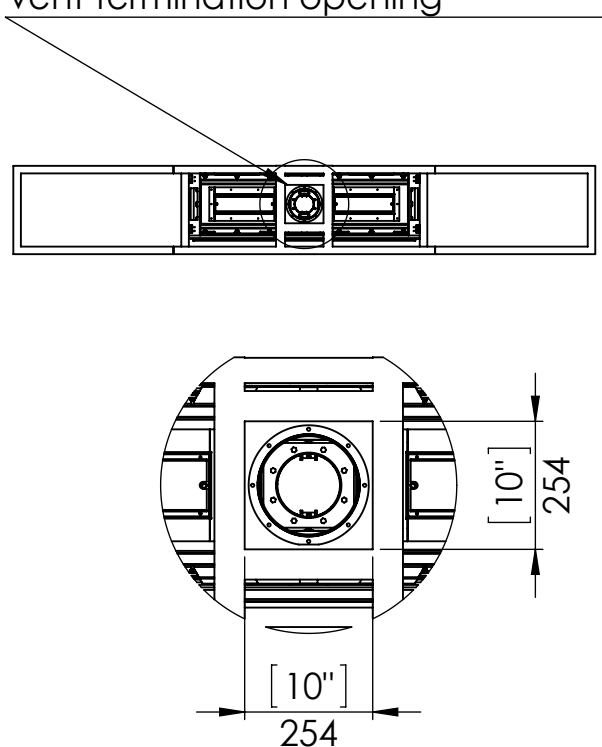


## Flat Installation

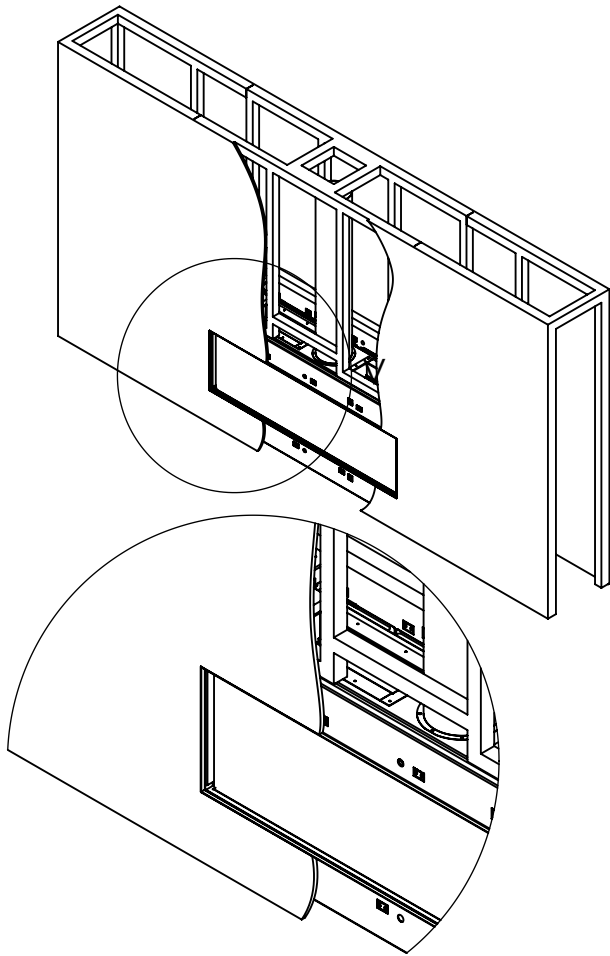


## L Shape Installation

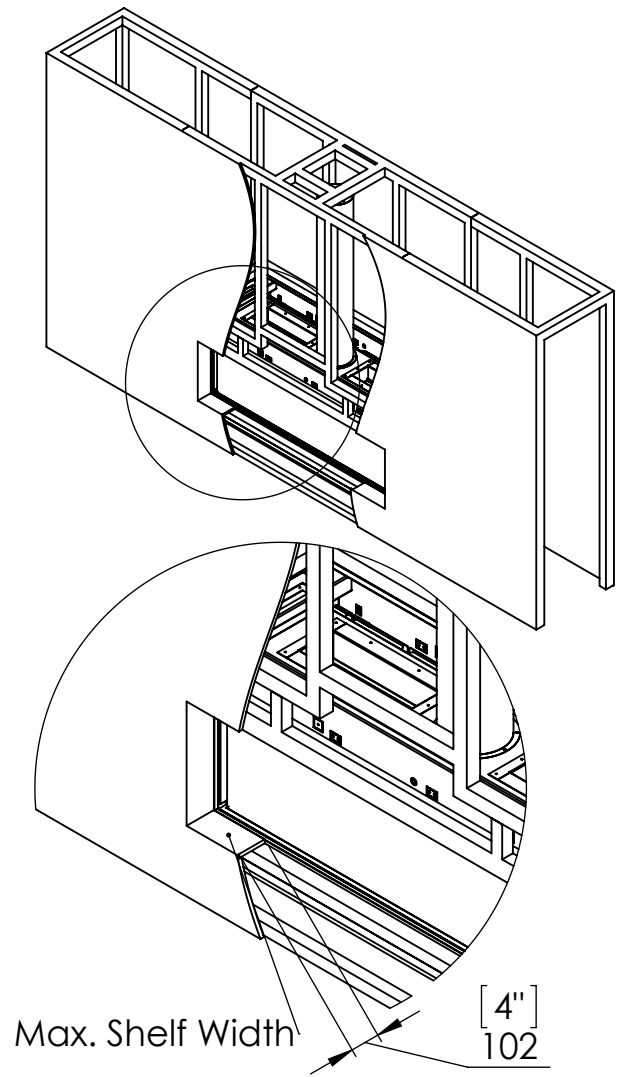

### Step 1 - Basic Framing :



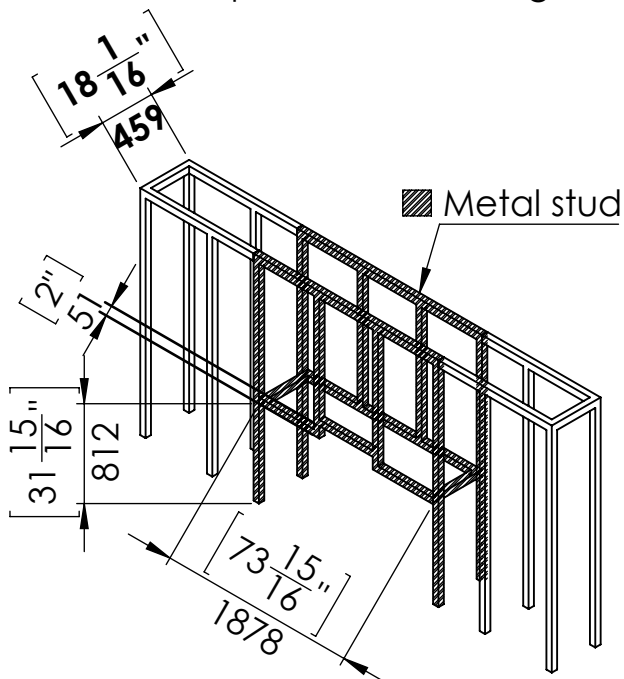


### Step 1 - Basic Framing :

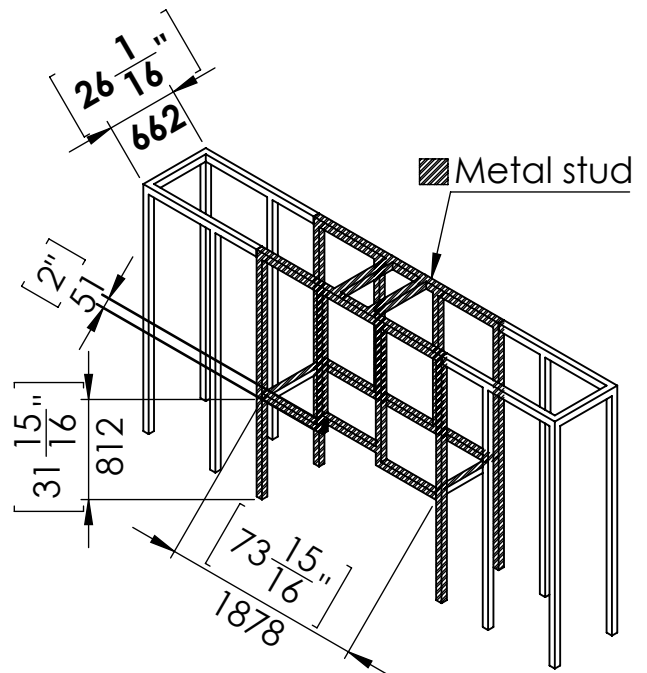


## Flat Installation

Step 2 -Positioning the Fireplace:

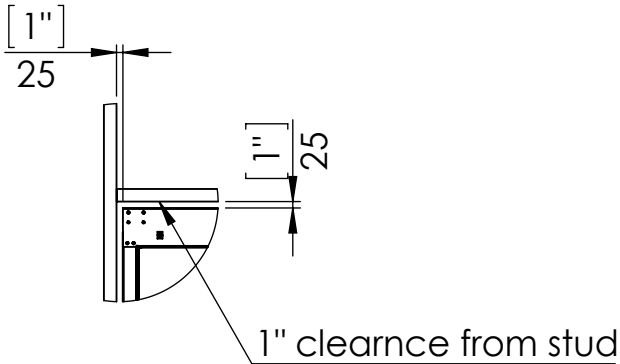
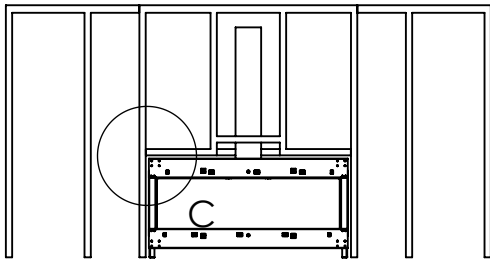
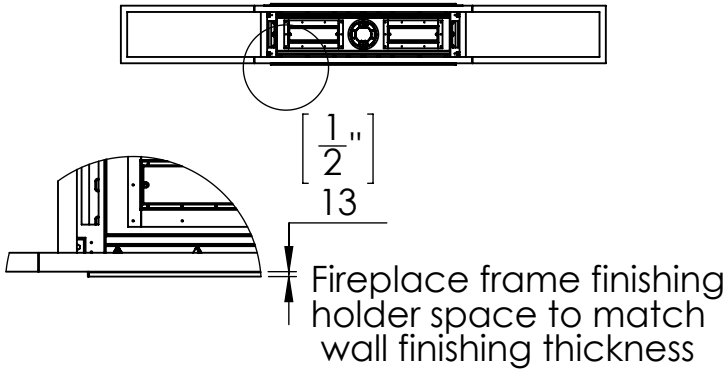


Last Step - Finishing The Fireplace Wall:

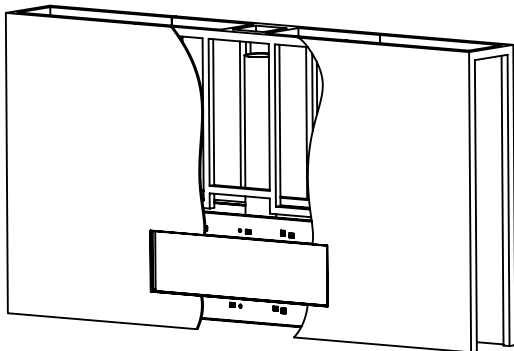


## L Shape Installation

Step 2 -Positioning the Fireplace:

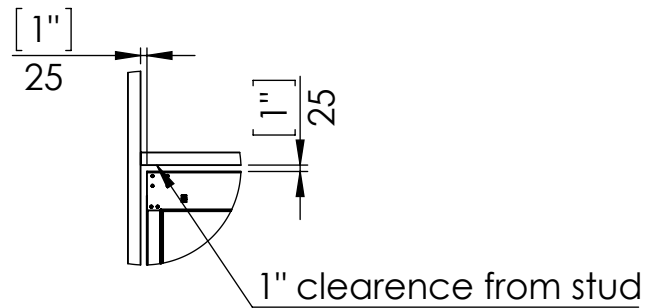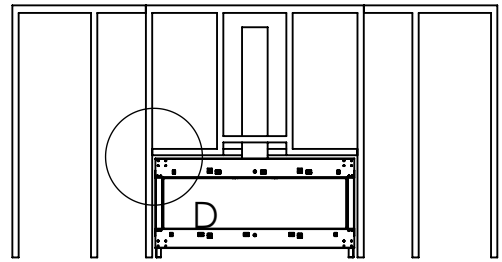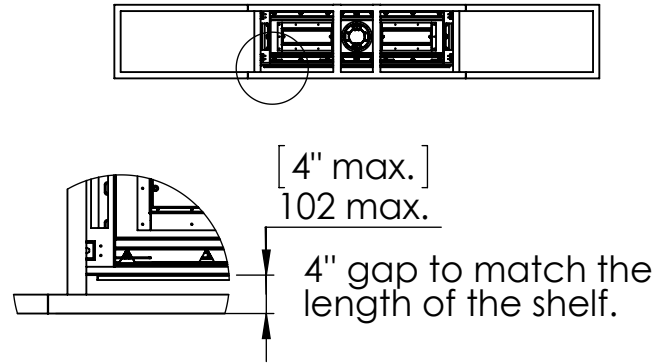


Step 3 - Framing Front Studs For L Shape:

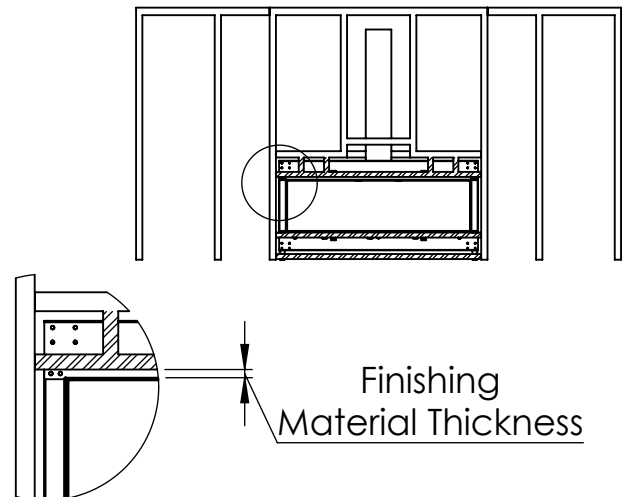

## L Shape Finishing Install

Last Step - Finishing The Fireplace Wall:

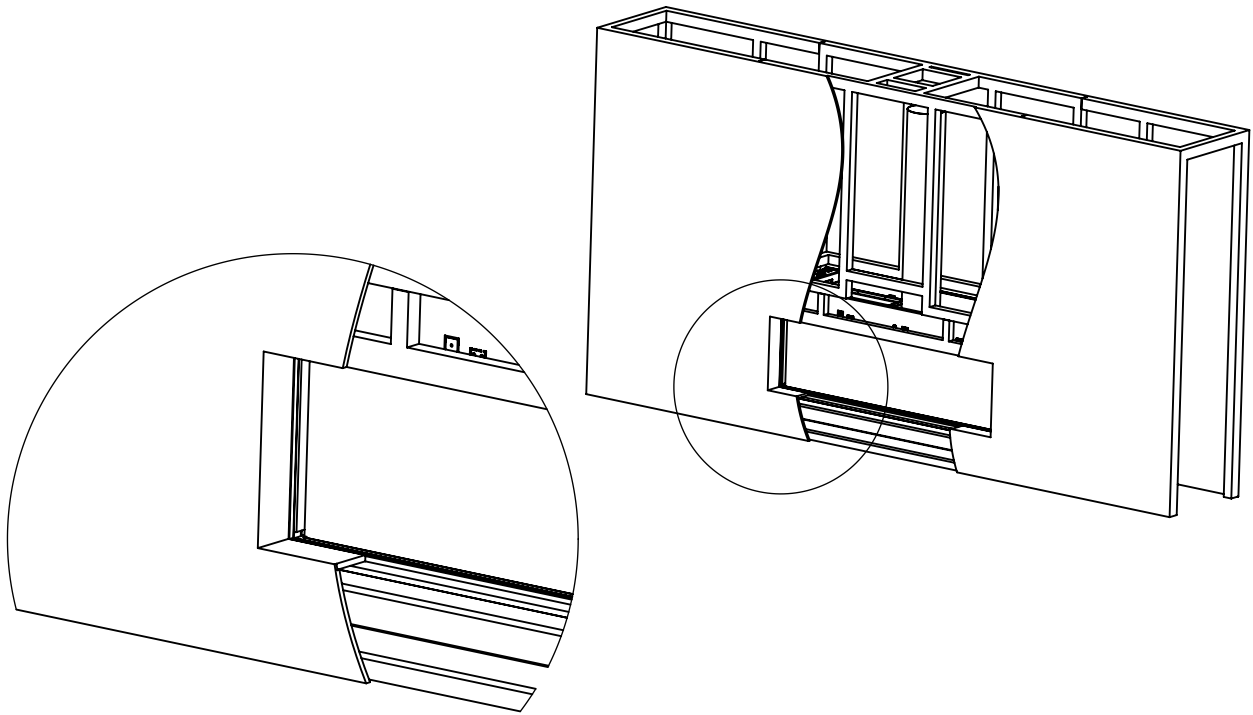

## Specifications for Appliance Flare See Through 70

Factor	NG	LPG
Burner Type	35,80,35	35,80,35
Orifice	550,800,550	160,180,160
BTU Max.	52200	43000
BTU min.	28000	20000
Kw/h	15.3k	12.6k
Chimney DIA.	5X8	5X8
Manifold Pressure[w.c]	3.4	8.8
Efficiency rate	82	79
Glass Size Length\Width	1700 X 420 mm	66" 15/16 X 16" 9/16'
Appliance Weigh	195Kg	430lb